

Item No.: FL-S400 / FL-S400H



Up to 100 lm/w or 130 lm/w LED

Precise optical lens system

10, 25, 40, 60, 90 degree beam angles are available.

2-10 times brighter than conventional light

Modular design, easier maintenance

Direct heat path technology

2-5 times better stability

Anti-Glare system

IP66 protection


3 years of warranty

400W LED FLOOD LIGHT



Parameters

Item No.	FL-S400	FL-S400(H)
LED Power	400W	400W
Light Source	Epistar	Bridgelux
LED QTY	6*9module (54 LEDs)	
Input Volt.	90-295Vac, 50/60Hz	
Power Factor	≥0.95	
Power Efficiency	≥90%	
CRI	Ra>65	
Luminous Flux	40,000LM	52,000 LM
Beam Angle	10°, 25°, 40°, 60°, 90°	25°, 40°, 60°, 90°
CCT	3000K; 5500K; 6500K	
Life-span	50,000h	
Storage Temp.	-40°C~+80°C	
Working Temp.	-25°C~+55°C	
Working Humidity	10%-90% RH	
IP Rating	IP66	
Dimension	574.4*416.5*95.4mm	
Weight	18kg	

Isolux Diagram

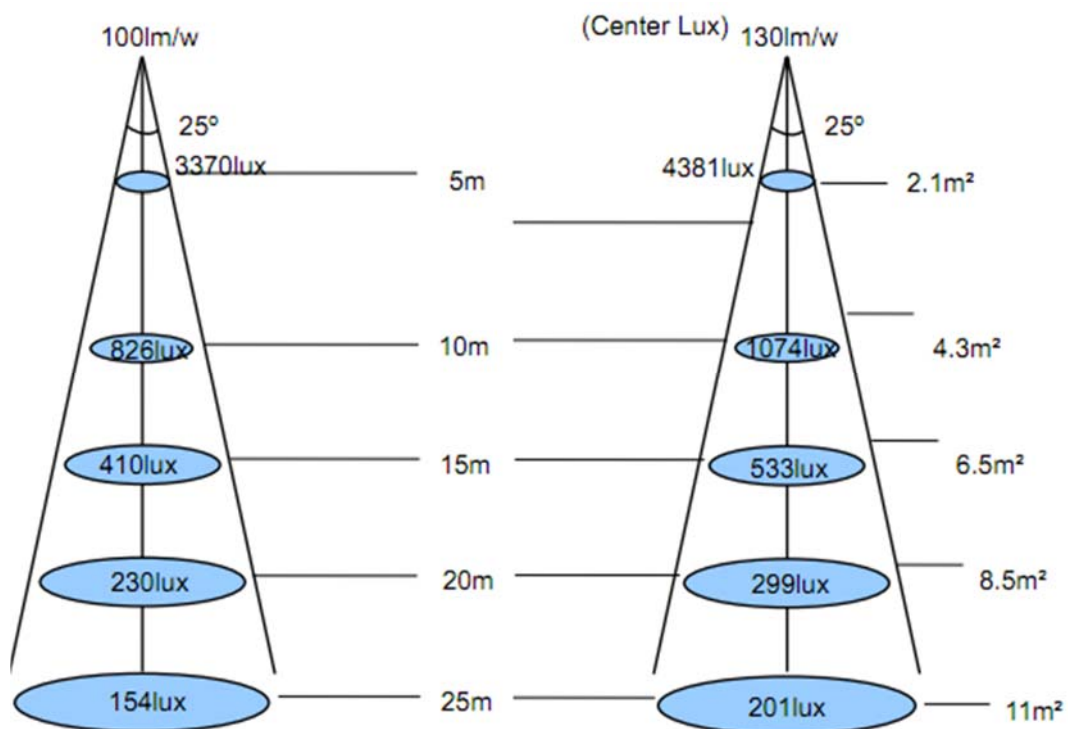


400W LED FLOOD LIGHT

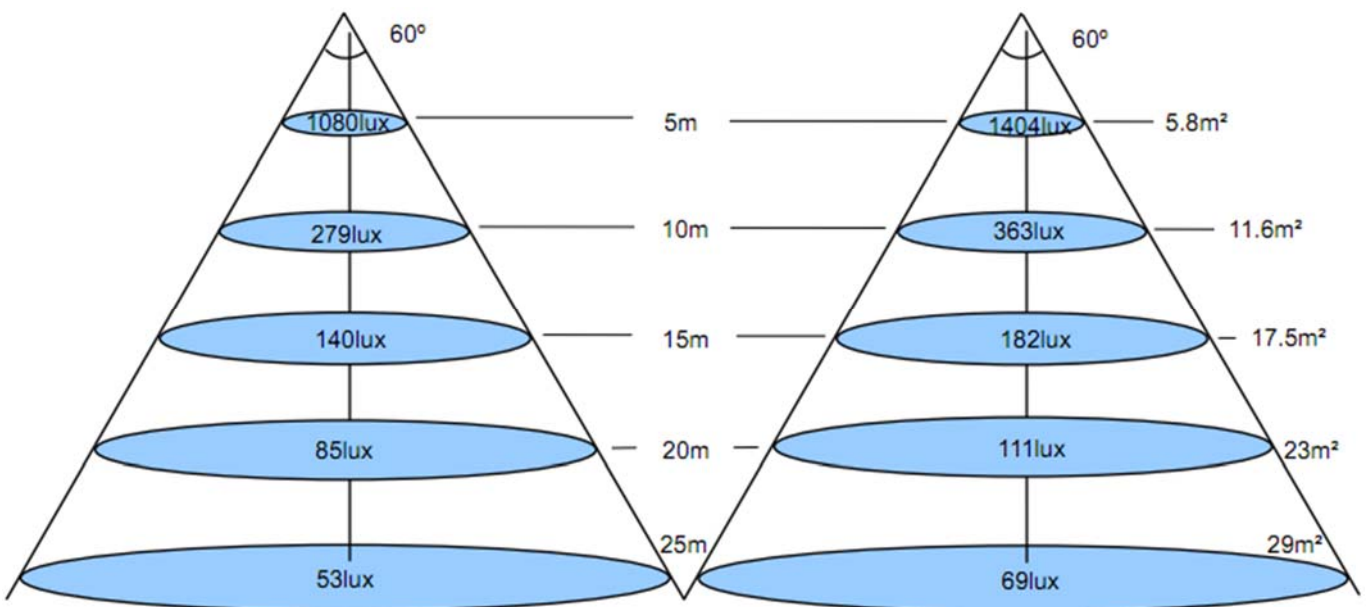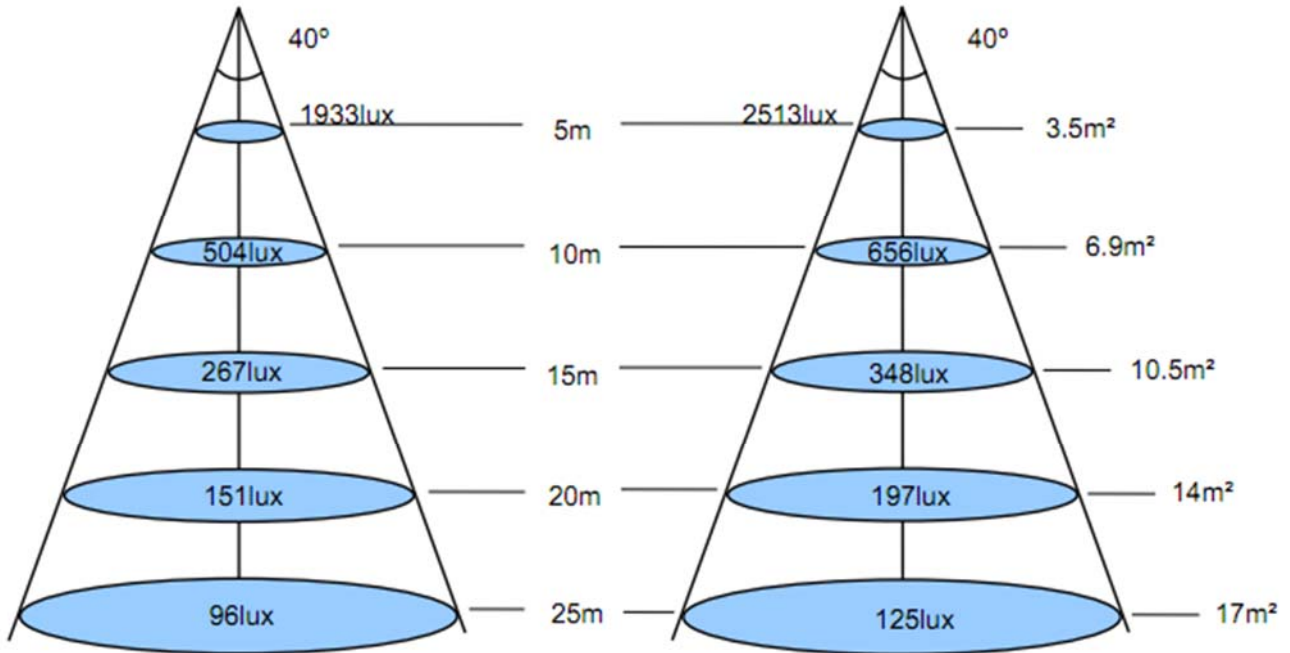


400W LED FLOOD LIGHT

Dimension

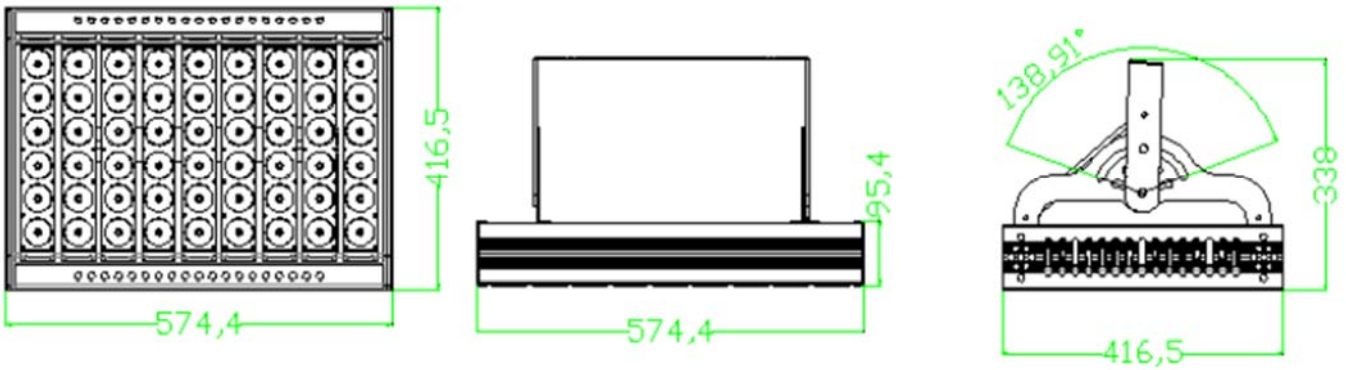

Packing Info.

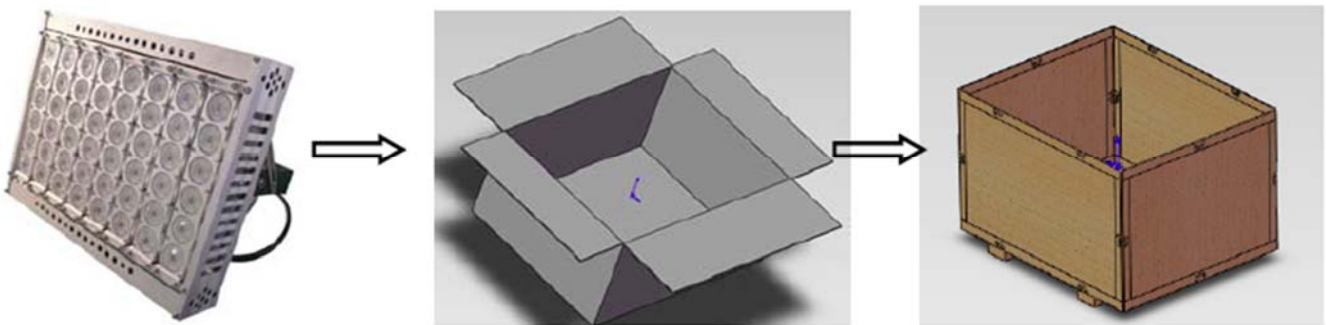

FEEL
LIGHT FEELIGHT TECH CO., LIMITED

Tel: +86 755-25828879
E-mail: info@feellights.com

Fax: +86 755-33154377
<http://www.feellights.com>

Copyright © FEELIGHT TECH CO., LIMITED All rights reserved.