

**Item No.: FL-S500 / FL-S500H**



**Up to 100 lm/w or 130 lm/w LED**

**Precise optical lens system**

**5, 10, 25, 40, 60, 90 degree beam angles are available.**

**2-10 times brighter than conventional light**

**Modular design, easier maintenance**

**Direct heat path technology**

**2-5 times better stability**

**Anti-Glare system**

**IP66 protection**


**3 years of warranty**

# 500W LED FLOOD LIGHT



## Parameters

Item No.	FL-S500	FL-S500(H)
LED Power	500W	500W
Light Source	Epistar	Bridgelux
Input Volt.	90-295Vac, 50/60Hz	
Power Factor	≥0.95	
Power Efficiency	≥90%	
CRI	Ra>70	
Luminous Flux	50,000LM	65,000 LM
Beam Angle	10°, 25°, 40°, 60°, 90°	5°, 25°, 40°, 60°, 90°
CCT	3000K; 5500K; 6500K	
Life-span	50,000h	
Storage Temp.	-40°C~+80°C	
Working Temp.	-25°C~+55°C	
Working Humidity	10%-90% RH	
IP Rating	IP66	
Dimension	695*466*95mm	
Weight	23.5kg	

## Isolux Diagram

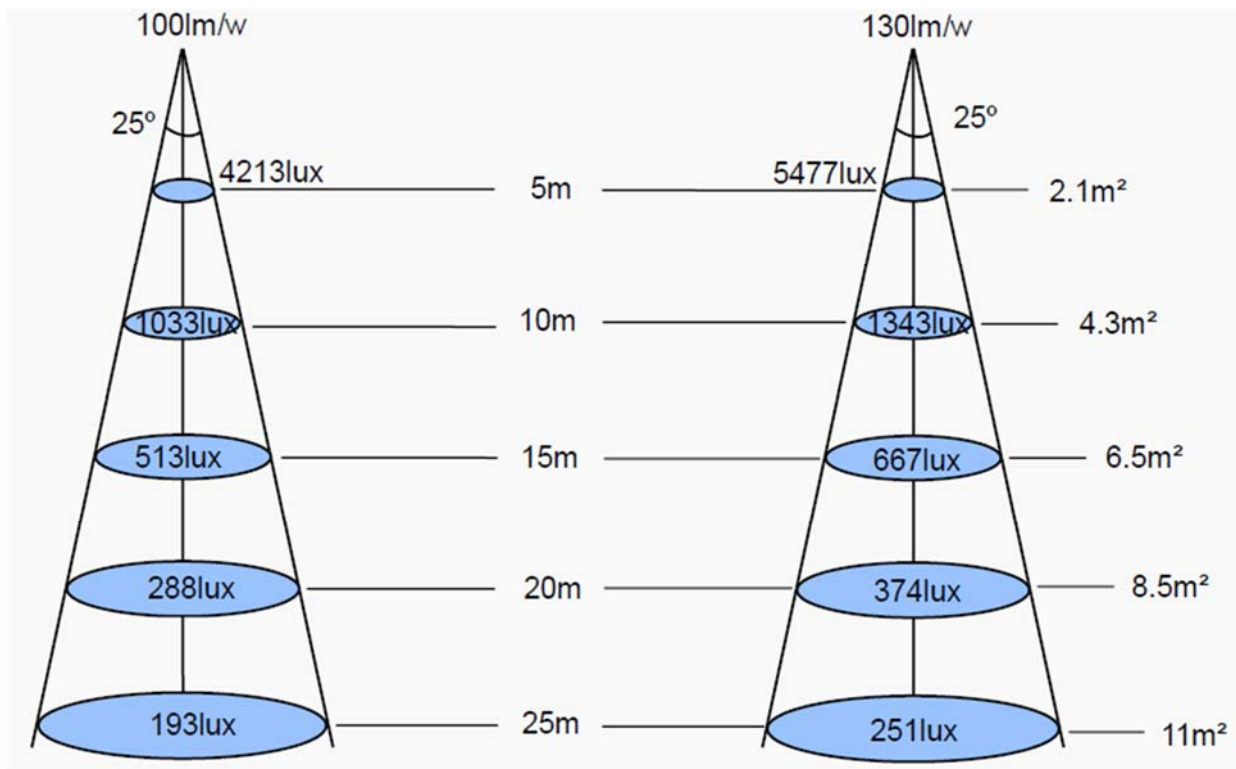


# 500W LED FLOOD LIGHT

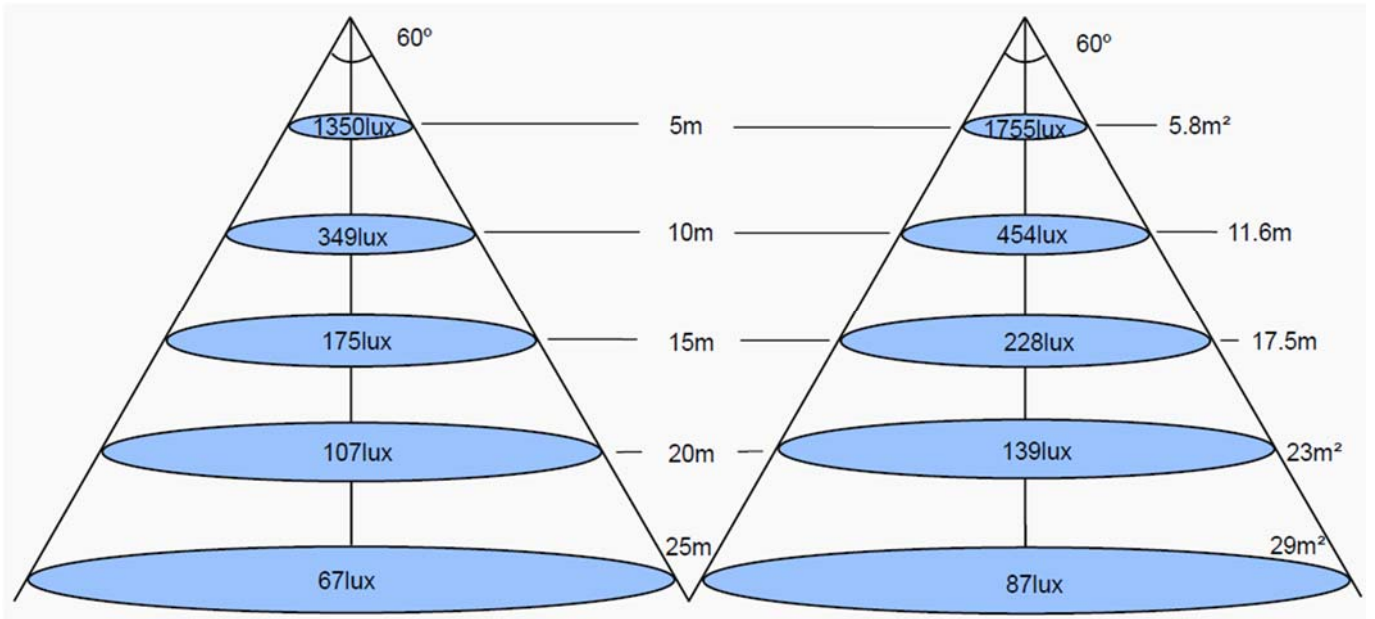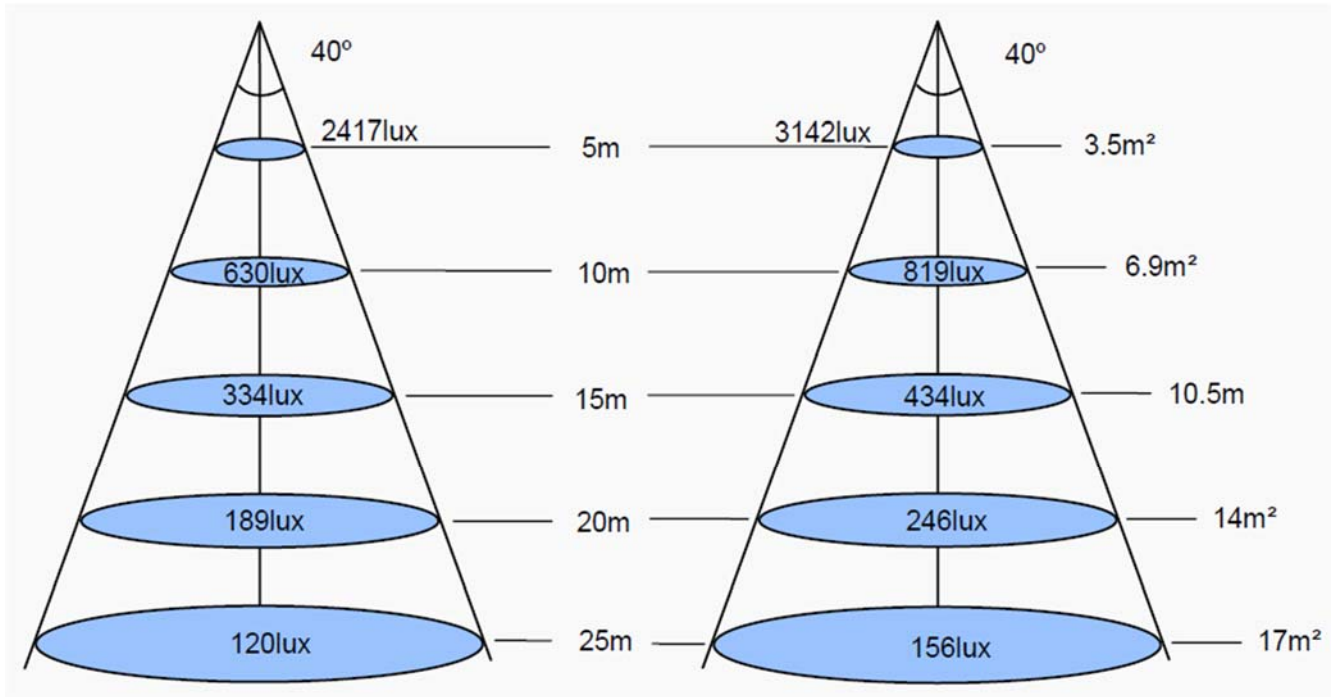

# 500W LED FLOOD LIGHT

---

## Packing Info.

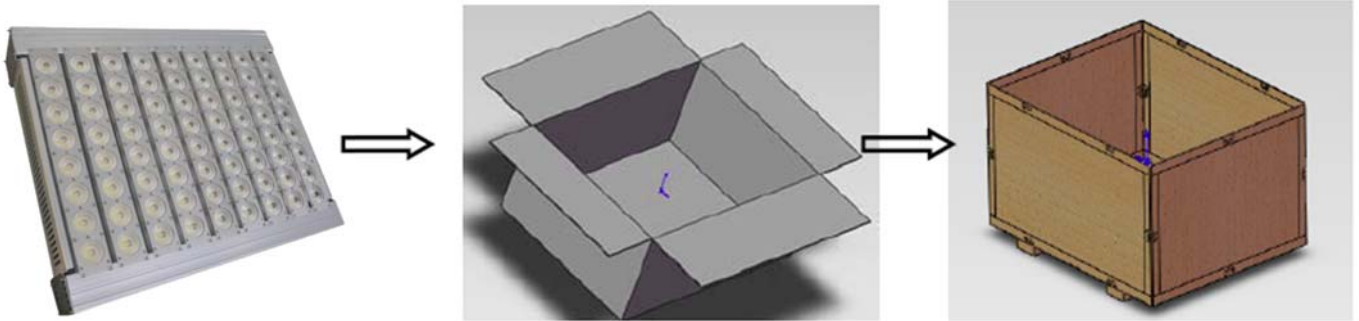

Carton size: 780\*540\*300mm, Gross weight: 32.5kg

---

**FEEL**  
LIGHT FEELIGHT TECH CO., LIMITED

Tel: +86 755-25828879

Fax: +86 755-33154377

E-mail: [info@feellights.com](mailto:info@feellights.com)

<http://www.feellights.com>

Copyright © FEELIGHT TECH CO., LIMITED All rights reserved.